



Made In India

Specialising in Cable Ties.

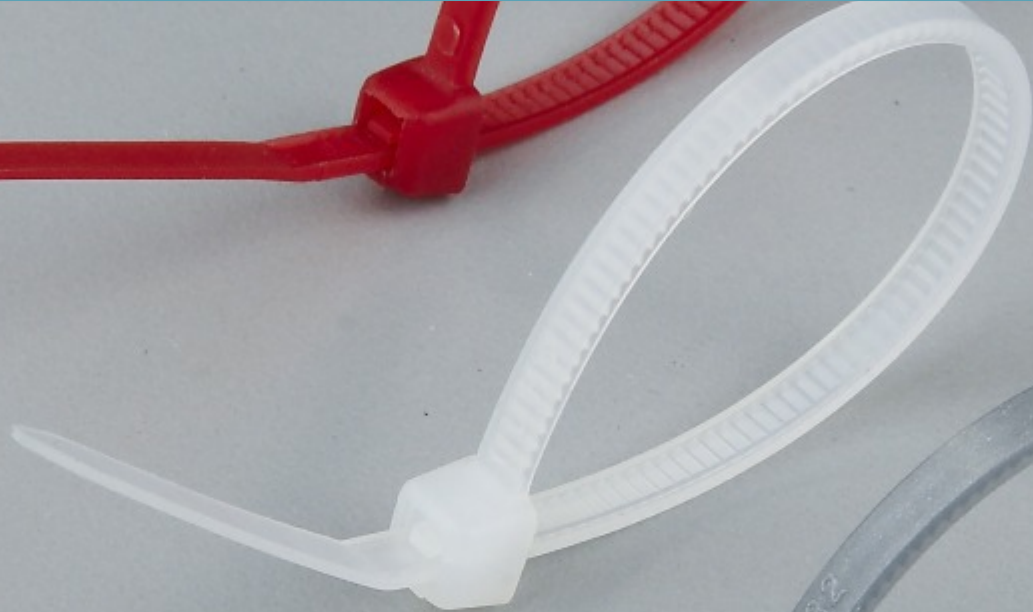


HOODS™

WORD OF TRUST

Hi.

I'm Ravi Surana.

*founder of Hoods Corporation.
We at Hoods constantly try to
improve our processes and be
consistent with our quality.*

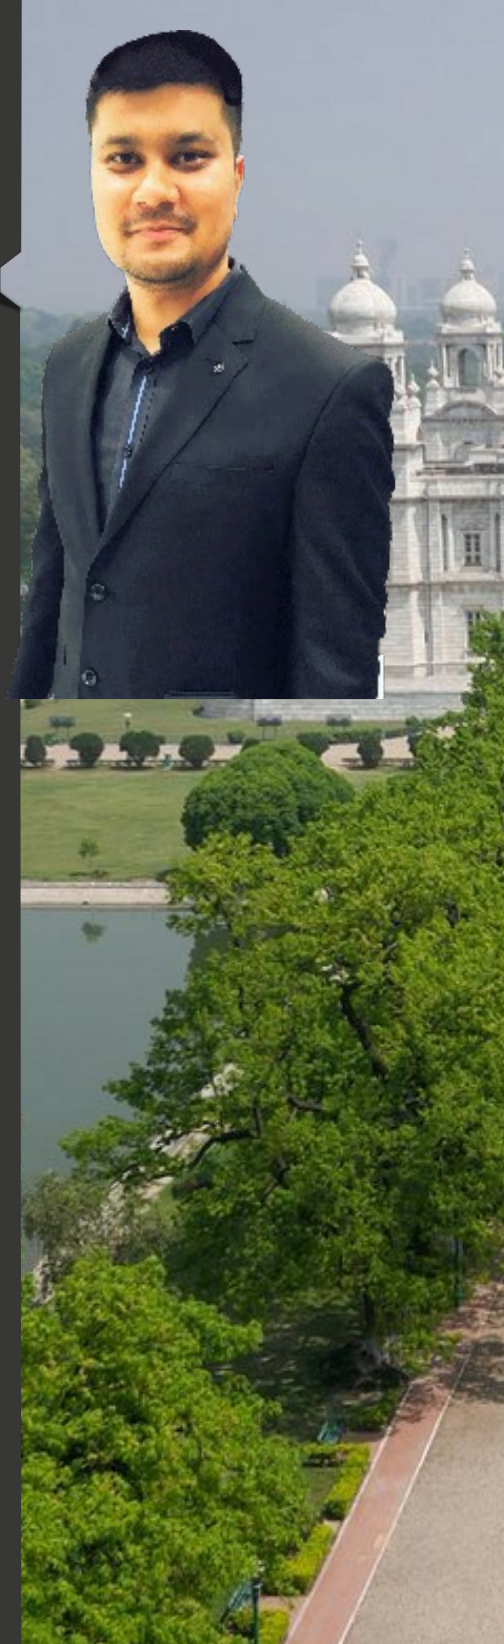


About Us:

Hoods Corporation established in 2009 manufactures various control panel accessories and provides specially engineered components parts including cable ties, cable clips and more, Hoods backs their line of speciality components with superior technical support and quality assurance. Hoods corporation reassures TRUST to its customers with every dealing. We have specialised R&D department and quality check department to bring you better products. We always manufacture the best product and maintain constant supply of the same, giving you the most exhaustive choice. We understand the need of industrial consumers for consistent quality and service. Browse through our catlog and experience the Hoods difference.

Establishment

Our head office is located in Kolkata which is the oldest operating port in India and the third most populous metropolitan city in India. Our Manufacturing facility which is just 10 km away from the port enjoys great connectivity. Our Facility has various testing equipments to ensure our final product is 99.99% complaint free.



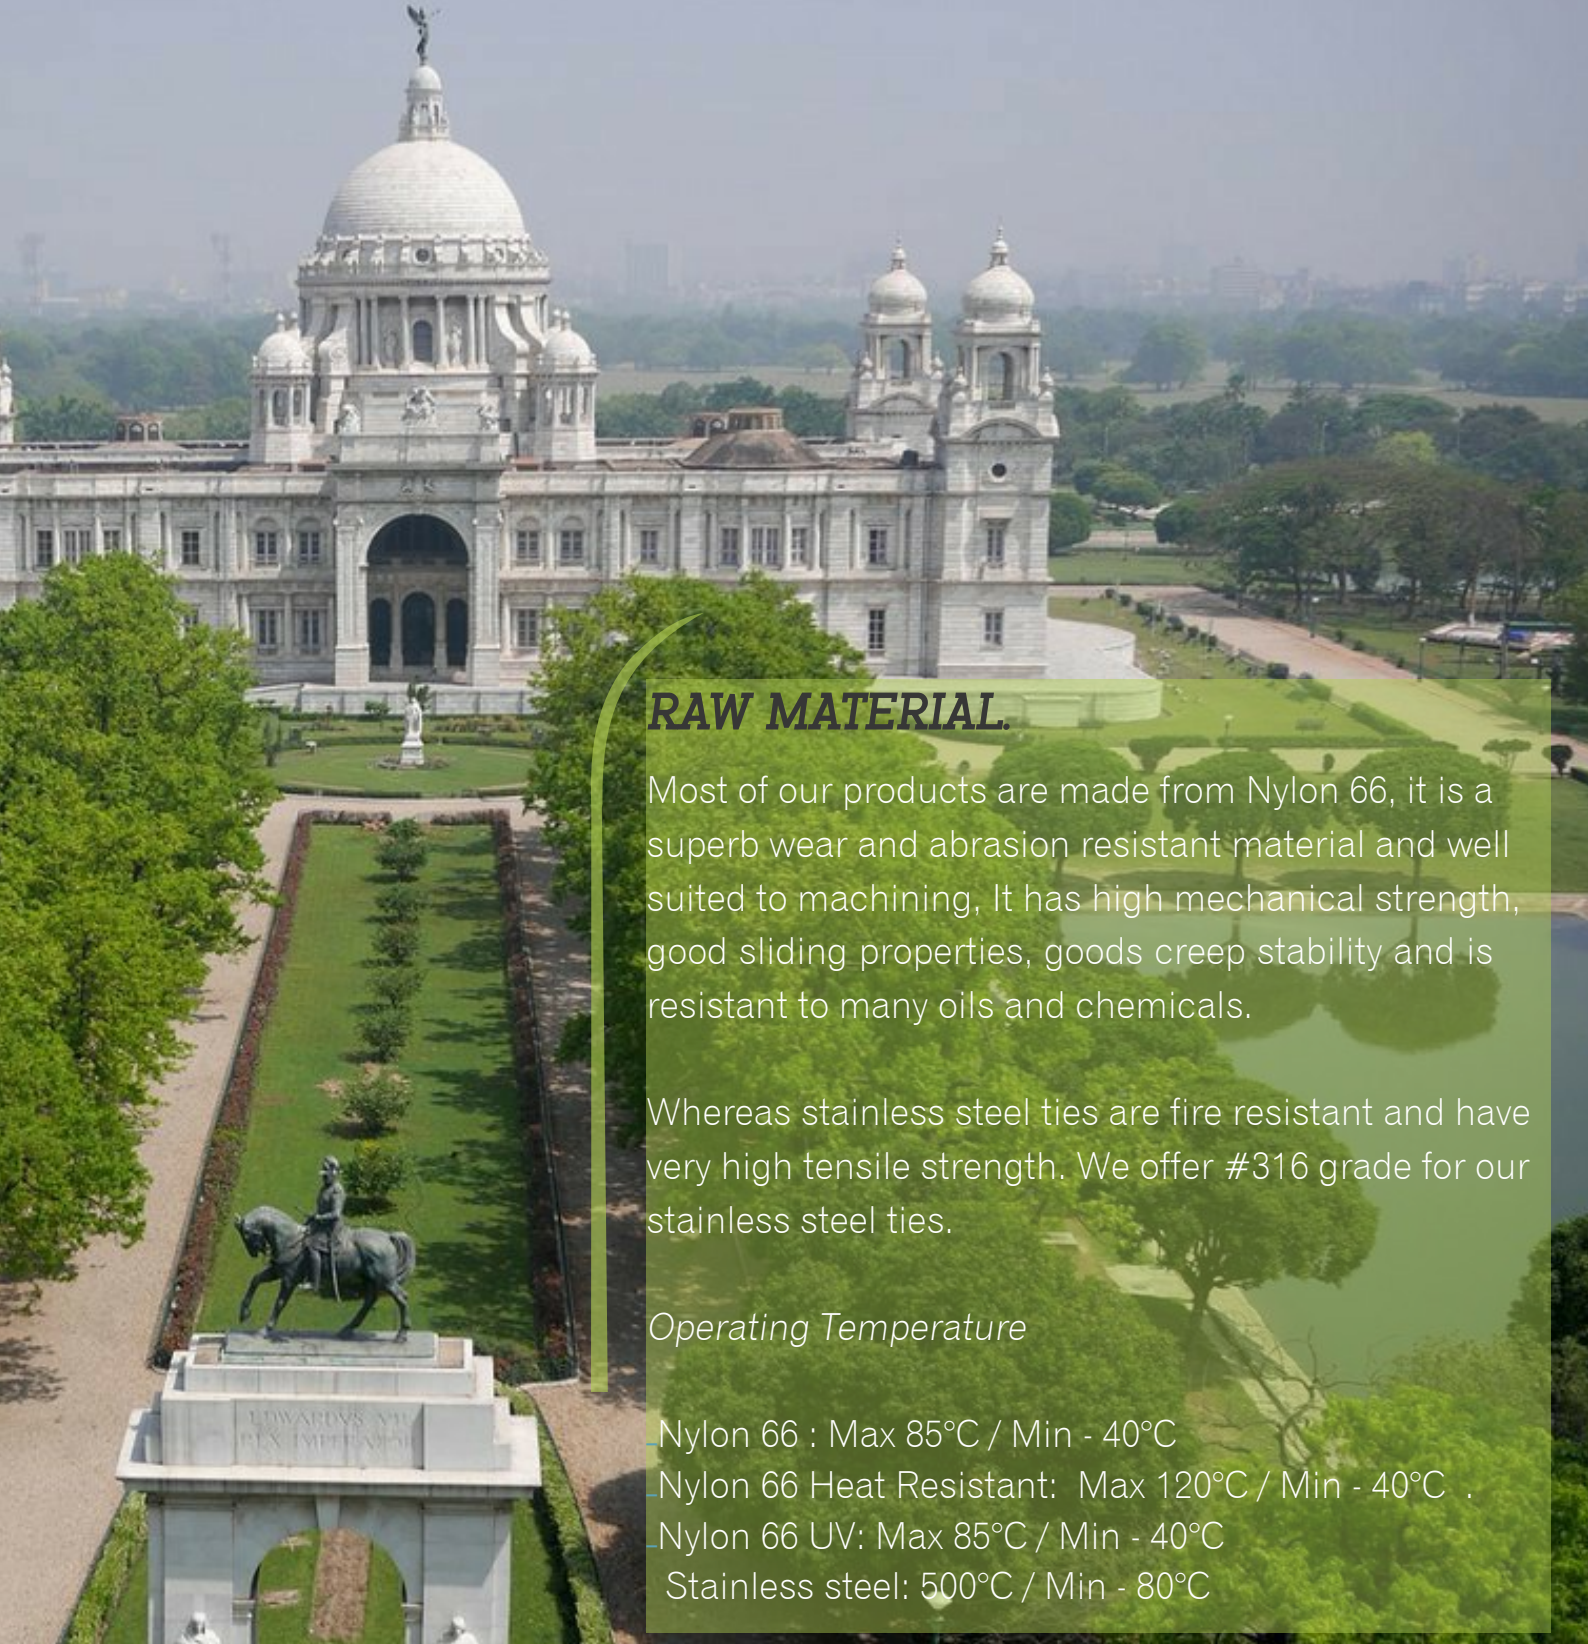

RAW MATERIAL.

Most of our products are made from Nylon 66, it is a superb wear and abrasion resistant material and well suited to machining. It has high mechanical strength, good sliding properties, good creep stability and is resistant to many oils and chemicals.

Whereas stainless steel ties are fire resistant and have very high tensile strength. We offer #316 grade for our stainless steel ties.

Operating Temperature


Nylon 66 : Max 85°C / Min - 40°C

Nylon 66 Heat Resistant: Max 120°C / Min - 40°C .

Nylon 66 UV: Max 85°C / Min - 40°C

Stainless steel: 500°C / Min - 80°C



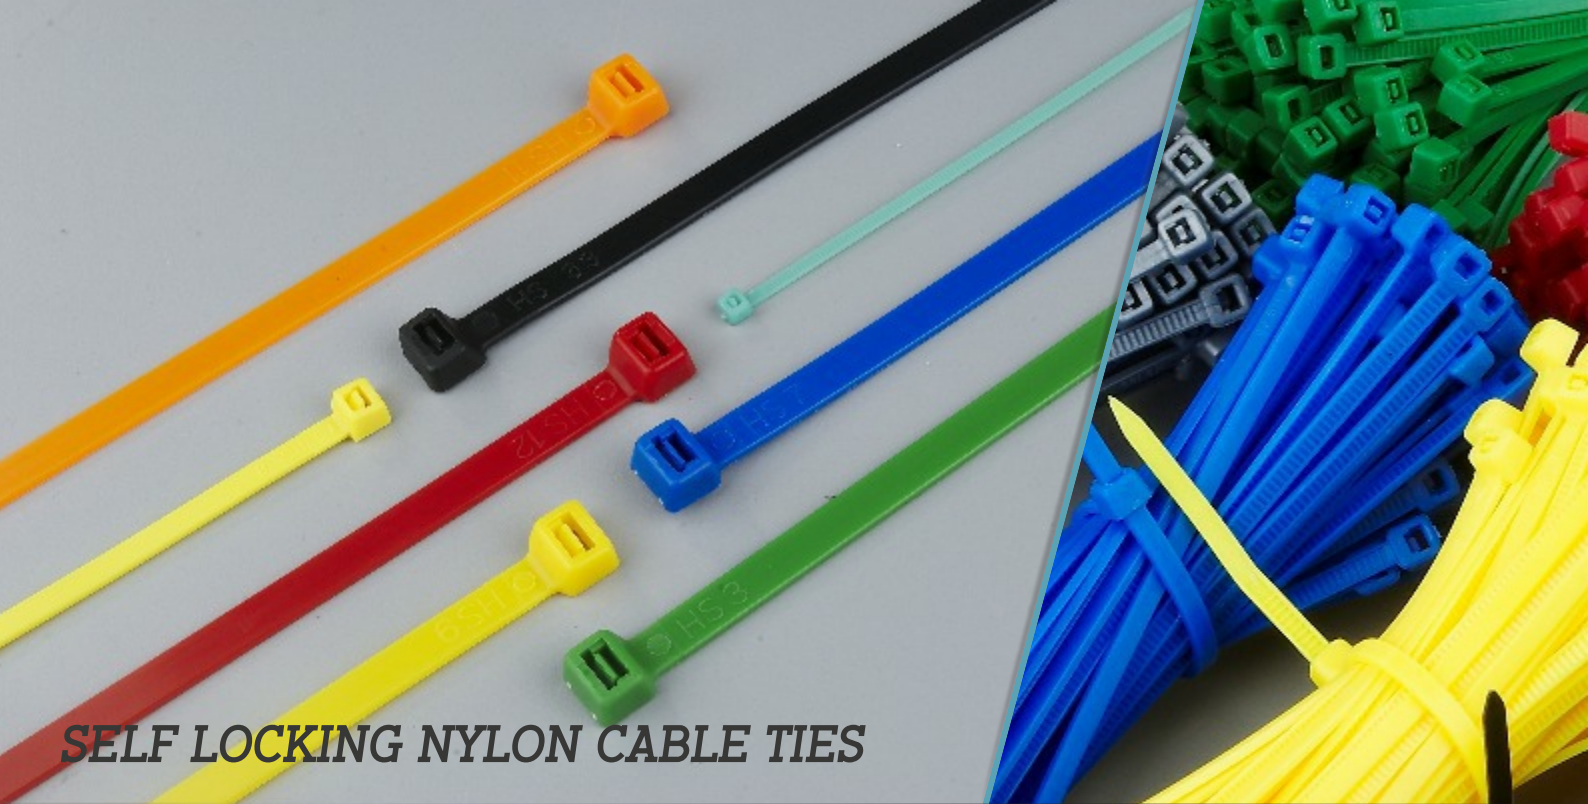

SELF LOCKING NYLON CABLE TIES



Industrial Cable Ties

Product Code	Length (L) (MM)	Width (W) (MM)	Thickness (MM)	Bundle Dia (E) (MM)	Tensile Min (KGS)
HS-100-IK	104	2.5	1.05	23	8
HS-100-I	104	2.5	1.05	23	8
HS-150-I	153	3.6	1.2	38	18
HS-200-I	203	3.65	1.25	51	18
HS-250-I	252	3.6	1.25	70	18
HS-300-I	300	4.2	1.35	83	22
HS-370-I	370	4.8	1.35	104	22
HS-400-I	400	4.2	1.36	115	22
HS-450-I	450	4.8	1.36	130	22
HS-500-I	500	4.8	1.36	150	22
HS-550-I	550	9	1.6	160	80
HS-630-I	630	9	1.6	190	80
HS-760-I	760	9	1.6	225	80
HS-920-I	920	9	1.6	265	80



*“ COLORS
AVAILABLE, FIRE
RESISTANT AND
UV RESISTANT
ALSO AVAILABLE ”*

Other Cable Ties

Product Code	Length (L) (MM)	Width (W) (MM)	Thickness (MM)	Bundle Dia (E) (MM)	Tensile Min (KGS)
HS-200-S	200	4.8	1.25	52	22
HS-250-S	250	4.8	1.3	69	22
HS-150-LT	150	2.5	1.1	35	8
HS-200-LT	200	2.5	1.1	50	8
HS-300-LT	300	3.6	1.25	80	18

Heavy Duty Cable Ties

Product Code	Length (L) (MM)	Width (W) (MM)	Thickness (MM)	Bundle Dia (E) (MM)	Tensile Min (KGS)
HS-150-HT	150	7.6	1.35	35	50
HS-200-HT	200	7.6	1.35	50	50
HS-250-HT	250	7.6	1.35	65	50
HS-300-HT	300	7.6	1.35	80	50
HS-370-HT	370	7.6	1.35	90	50
HS-430-HT	430	7.6	1.35	115	50
HS-530-HT	530	7.6	1.35	145	50

1. Material: SS#316
2. Used where fire , corrosion, vibration, radiation extremes are concern.
3. Self locking ball bearing mechanism

SS BALL LOCK CABLE TIES

SS CABLE
TIES
(RELEASABLE)

SS Ball Lock Cable Ties

Product Code	Length (L) (MM)	Width (W) (MM)	Thickness (MM)	Tensile Min (KGS)
HS46150SS	150	4.6	0.25	55
HS46200SS	200	4.6	0.25	55
HS46260SS	260	4.6	0.25	55
HS46300SS	300	4.6	0.25	55
HS46360SS	360	4.6	0.25	55
HS46450SS	450	4.6	0.25	55
HS46520SS	520	4.6	0.25	55
HS46680SS	680	4.6	0.25	55
HS46840SS	840	4.6	0.25	55

Marker Ties

Product Code	Length (L) (MM)	Width (W) (MM)	Bundle Dia (MM)	Mark Space (MM)
HS-110-MT1	110	2.5	8	20.4x9.1
HS-260-MT1	260	4.8	22	20x4x9.1
HS-110-MT2	110	2.5	8	46x26
HS-260-MT2	260	4.8	22	46x26

1. PPA Powder Coating
2. UV Resistant
3. Halogen Free
4. Flame Retardant
5. Non toxic

1. Material PP
2. With gripping spikes for bags
3. Colors available
4. Customers logo and serial number can be laser marked or printed.

SECURITY SEAL

SS Cable Ties Releasable

Product Code	Length (L) (MM)	Width (W) (MM)	Thickness (MM)	Tensile Min (KGS)
HS9150SSR	150	9	1.1	200
HS9230SSR	230	9	1.1	200
HS9330SSR	330	9	1.1	200
HS9450SSR	450	9	1.1	200
HS9600SSR	600	9	1.1	200
HS9750SSR	750	9	1.1	200
HS9900SSR	900	9	1.1	200

Security Seal



Product Code	Length (L) (MM)	Width (W) (MM)	Tag Size (MM)
HS-250-R	250	4	12x30


Circle Cable Clips

Product Code	H (MM)	D (MM)	Nail
HS-4mm	5.3	4	1.7x14
HS-5mm	6.3	5	1.7x14
HS-6mm	7.4	6	1.85x16
HS-7mm	8.4	7	1.85x18
HS-8mm	9.4	8	1.95x19
HS-9mm	10.4	9	2.05x22
HS-10mm	11.4	10	2.20x23
HS-12mm	13.4	12	2.20x25
HS-14mm	16.4	14	2.35x30
HS-16mm	17.7	16	2.35x32
HS-18mm	19.7	18	2.6x38
HS-20mm	22.2	20	2.7x40
HS-22mm	25	22	2.9x43
HS-25mm	27.7	25	3.1x50
HS-30mm	32.5	30	3.5x50
HS-32mm	35.6	32	3.5x55
HS-35mm	36.6	35	3.5x60
HS-40mm	38	40	3.5x65



Flat Cable Clips

Product Code	H (MM)	A (MM)	B (MM)	Nail
HS-4mm	6	3.8	4	1.7x14
HS-5mm	6	3.8	5	1.7x14
HS-6mm	6.5	4.1	6	1.7x16
HS-7mm	7	4.7	7	1.9x16
HS-8mm	7.5	5	8	2.1x19
HS-9mm	8.2	5.4	9	2.1x20
HS-10mm	8.6	5.7	10	2.3x21
HS-12mm	9	6.1	12	2.3x23
HS-14mm	11	8	14	2.3x25
HS-18mm	12.5	10	18	2.6x27



HOODS™
WORD OF TRUST

Marketing Office: Hoods Corporation, 54 Ezra street, 3rd floor, Room B8/1, Kolkata: 700001, WB, INDIA
 Manufacturing Facility: D.H. Road, Konchowki, Bhasa, Joka.
 Ph: +91 33 22354444
 Mob: +91 9831949100
 Skype: hoodscorp
 Email: sales@hoodscorp.com

www.hoodscorp.com