



SHRI TULSI SWITCHGEAR PVT. LTD

ISO-9001:2015, ISO-45001:2018 CERTIFIED COMPANY

PRICE LIST

(W.E.F 01.01.2020)

L.V. SWITCHGEAR & CONTROLGEAR DEVICES

OUR VISION

Commitments, Innovation & Better Service with Perfect Quality

**Control, Connecting, Insulating
Measuring, Sound Indication
Signalling & Solid State Device**



Directorate of Industries,
Uttar Pradesh
उद्योग निदेशालय उत्तरप्रदेश

★ CERTIFIED COMPANY ★

CONTENTS

S.No.	Item	Confirm to IS specification	Specification	Page
1	STS Remote Control Units [Actuator]	IS/EC-60947-Part-5 (Sec.1) 2004	With Metallic Body/Bezel in Series "ST", "SA", "SS", cutout Dia /22.5 30.5mm. Shrouded, Unshrouded, Selector Mushroom, Stayput Mushroom, Key Type Selector, Key Type Mushroom & Key Actuator, Illuminated Actuator colour in Red, Green, Yellow, Blue & Clear	1-2
2	STS LED Illuminated Actuator	IS/EC-60947-Part-5 (Sec.1) 2004	Utilizing Light Emitting Diodes [LEDs], Illuminated shrouded & Selector Actuator in all suitable ranges AC/DC [6V to 415V] Colour -Red, Green, Blue, Yellow, Amber, Clear & White suitable panel cutout dia 8.5 mm 10mm, 14.5mm, 19.5mm, 22.5mm for & 30.5mm, current capacity 6Amps 415V AC and 1Amps 220V DC.	1
3	STS LED Indicating Lights	IS/EC-60947-Part-5 (Sec.1) 2004	Utilizing Light Emitting Diodes [LEDs], Solid State in all suitable range AC/DC 6V to 415V Colour - Red, Green, Yellow, Amber, Blue, Clear & White. Suitable for panel cutout dia 8.5mm, 10m, 14.5mm, 19.5mm, 22.5mm & 30.5mm.	2
4	STS Pilot Light Units [Indication Light]	IS/EC-60947-Part-5 (Sec.1) 2004	Type of Voltage AC/DC Series "SPL", Glass lens, Polycarbonate lens, Filament Bulb Bayonet type & Screw Type 12V to 130V, 2.6W, 12V to 220/250V 7/10w neon bulb and suitable resistor. Colour - Red, Green, Amber, Blue, yellow, Clear & Milky.	2
5	STS Limit Switches	IS/EC-60947-Part-5 (Sec.1) 2004	In Series with 2, 3 & 4 Set of Contacts 1NO+1NC, 1No+2NC, 2NO+1NC, 2NO+2NC Open execution & with die cast enclosure tight, lever or without lever type	3
6	STS Push Button Stations	IS/EC-60947-Part-5 (Sec.1) 2004 IS-2147 1982	With SS, ST & SA Series Aluminium Die Casted, Pendent type, dust & water proof encloser, 1 to 20 way with shrouded or unshrouded or Selector or Key mushroom or Key type Actuator or Indicating Lights	4
7	STS HRC Fuse Base & Carriers	IS-13703 Pt-2 SEC-1 1993	Current rating 20A,32A,63A,125A, 250A, 400A, 630A Open type/enclosed-type in front, back & busbar connection type In Bakelite/DMC Thermoplast material	5
8	STS Electronic Buzzer	IS-2268 1994	Electronic Hooter/Buzzer/ Magnetic Buzzer Single Tone/ Three Tone for all suitable Voltage 12V, 24V, 36V, 48V, 110V, 220V AC/DC audio output 95db to 120 db	5
9	STS Industrial Hooter AC/DC	IS-2268 1994	Alluminium Die Casted 12V, 24V, 36V, 48V, 110V, 220V AC/DC audio output 95db to 120 db for all suitable voltage.	5
10	STS Gong Bell-Heavy Duty	IS-2268 1994	Alluminium Die Casted 12V, 24V, 36V, 48V, 110V, 220V AC/DC Single Phase.	5
11	STS Reverse Forward Switch Cam Operated	IS/IEC-60947 Pt-5 Sec -1 2004	16-32 Amp. Reverse Forward Switch	5
12	STS Digital Amp & Volt Meter	IS-1248 Pt-2 2003	Volt Meter 0-1000V, Amp Meter in all suitable range & frequency meter. Ameter 0-800A [CT operated]	5
13	STS Terminal strips Terminal Block Type	IS/IEC-60947 Pt-5 Sec -1 2004	6, 10, 15, 30, 60, & 100A Open/Close Type in PVC, Bakelite & DMC materials, 2 way to 16 way size.	6
14	STS Spare Panel Accessories	IS/IEC-60947 Pt-5 Sec -1 2004	MS Channel for Terminal, Clamp & Protective Cover, Brackets for STR SS Series Limit Switches Roller Assembly, Adaptor for 25.5 & 30.5 Cutout Dia	6
15	STS Foot Switches	IS-60947 Pt-5 Sec-1 2004	With Guard, Without Guard contact arrangement 1NO+1NC or 2NO+2NC in Die Cast Body Alluminium enclosure.	7
16	STS Shunts	IS-1248 Pt-2 2003	"STS" shunts compose of one or more rods/strips of maganin alloy Alloy soldered into brass blocks	7
17	STS Low Tension Current Transformer, Type Wound BPL Type and Epoxy Resin Cast Type	IS-2705-1992	STS Current Transformers are made from torodal core of high permeability silicon core. Transformers reproduce proportionate primary current or its secondary side which is required for extending the range of instrument. Accuracy of the current transformer is selected in accordance to the design & rating of the instrument. Range available-tape wound 5VA,10VA & 15A class 1.0 & Class 5 P10	7
18	STS Metal Clad Plug & Socket AC BOX	IS-IEC-309 Pt-3&4	Metal Clad Plug & Socket 10 Amp, 20Amp, 250V, 2 Pole & 20Amp, 30Amp & 63 Amp, 440V, 3 Pole & Enclosure	7
19	STS Busbar Supports/ Insulators type "TBS"	IS/IEC-60947 Pt-5 Sec -1 2004	25x25mm to 100x60mm/ 50H to 60H/ 60mm to 150mm or different shape of Conical/ Hex/ Cylindrical/ Single Pole / L Type / Finger type busbar supporters & Insulators in DMC. 63 to 250A TP & TPN terminal connector, HT pot Insulators & Neutral Links 16 to 100 Amp.	8-9
20	STS Analog Amp. & Volt Meter	IS-1248 Pt-2 2003	Ammeter Single Range upto 1200 Amp. , Voltmeter 15-300 V & 500-600; Moving Coil DC Ammeter 0-20 Amp. with internal shunt,30-5000A with External shunt ; frequency meter	8
21	STS HRC Fuse Link	IS-13703 Pt-2 Sec-1 2004	For Industrial Application rating 2 Amp to 630 Amp 415 voltAC, NS Type with Staggered Tags, Central tag type to 2 hole fixing-bolted, TSA type of central tag with 2 hole fixinbolted TIA type offset tag with 2 hole fixing-bolted & wikman type	10-11
22	STS Rotary Switches & Rotary Cam Switches.	IS-60947 Pt-5 Sec-1 2004	Rating 6A-500 volts in different pole & ways, Amps & voltmeter Selector, Switch, Phase Change Over Switches for motor duty application, forward-off-reverse switches, Change Over Switches & programming Switches with deferent pole, Position & ways.	12-13

REMOTE CONTROL UNITS (With Metallic body/ bezel)

Sl. No.	Description	Cat. No.	Unit Price (RS.)	Std. Pkg. (No's)	Product Picture
01.	Spring return Shrouded push Button with bracket in RED, GREEN, YELLOW, BLUE ● ● ● ● BLACK, WHITE, GREY ● ○ ●	STR	52/-	20	
02.	Spring return Unshrouded push Button with bracket in RED, GREEN, YELLOW, BLUE ● ● ● ● BLACK, WHITE, GREY ● ○ ●	STRU	57/-	20	
03.	Spring return Mushroom head push button with bracket in RED, GREEN, YELLOW, BLUE ● ● ● ● BLACK, WHITE, GREY ● ○ ●	STMR	79/-	10	
04.	Stayput Push Button with press to lock and turn to reset feature with bracket in RED, GREEN, ● ●	STPR	90/-	10	
05.	Stayput Mushroom Button with key (press to lock & key to release) key removable in actuated or in unactuated position lockable in actuated position ● RED,	ST1PL	460/-	10	
06.	Selector Key Actuator (2 position maintain contact, key removable in both position	ST2L	450/-	10	
07.	Selector Key Actuator (2 position maintain contact, key removable in on position	ST-2L-ON	450/-	10	
08.	Selector Actuator (2 position maintain contact, key removable in OFF position	ST-2L-OFF	450/-	10	
09.	Selector Actuator (2 Position With Bracket	ST-2S	145/-	10	
10.	Selector Actuator (3 Position With Bracket	ST-3S	145/-	10	
11.	Spring return Selector Actuator, 2 Position	ST-2SR	145/-	10	
12.	Spring return Selector Actuator, 3Position	ST-3SR	145/-	10	
13.	Contact Element 1 NO Rear Connection	E-1	45/-	50	
14.	Contact Element 1 NC Rear Connection	E-2	45/-	50	

STS REMOTE CONTROL UNITS (With Thermoplastic Body/Bezel)

15.	Spring return Shrouded push Button with bracket in Glass Filled Thermo Plastic Bezel in RED, GREEN, YELLOW, BLUE ● ● ● ● BLACK, WHITE, GREY ● ○ ●	PSTR	60/-	20	
16.	Contact Element NO or NC regular size	PBE-1 PBE-2	79/- 79/-	20 20	
17.	Stayput Mushroom head push Button with press to lock and turn to reset feature with bracket ● ● ● ● BLACK, WHITE, GREY ● ○ ●	PSTPR	121/-	20	






REMOTE CONTROL UNIT IN SERIES "SA" (415V 50 HZ CUTOUT DIA 30.5 MM)

18.	Shrouded Mini actuator RED, GREEN, YELLOW, BLUE ● ● ● ● BLACK, WHITE, GREY ● ○ ●	SARM	145/-	10	
19.	Shrouded Actuator RED, GREEN, YELLOW, BLUE ● ● ● ● BLACK, WHITE, GREY ● ○ ●	SAR	163/-	10	
20.	Mushroom Actuator in RED, GREEN, BLACK ● ● ●	SAM	172/-	10	
21.	Stayput Actuator Mushroom Knob Press to ON and PULL to Reset	SAPR	181/-	10	
22.	Selector Actuator 2 Position Black Colour ●	SA-2S	237/-	10	
23.	Selector Actuator 3 Position all Contacts open in centre position Black Colour ●	SA-3S	237/-	10	
24.	Key Actuator lockable in pressed Position key removable in pressed position	SA-1L-ON	514/-	10	
25.	Key Actuator lockable in unpressed Position key removable in unpressed position	SA-1L-Off	514/-	10	
26.	Key Actuator lockable in pressed and unpressed Position key removable in both position	SA-2L	514/-	10	
27.	Key Actuator press to lock key to reset	SA-1PL	523/-	10	
28.	Contact Element 1NO + 1NC with 2 Fixing screw.	SE-1	125/-	10	

Illuminated Actuator Utilizing light Emitting Diodes (LEDs)

Sl. No.	Description	Cat. No.	Unit Price (RS.)	Std. Pkg. (No's)	Product Picture
29.	Flush Illuminated Actuator with integral circuit & Cluster LED Dimension : Suitable for panel cutout size 22.5mm Body material : Non flammable, non-hydroscopic, corrosion resistant glass filled thermoplast material, voltage : 6V, 12V, 24V, 48V, 63V 110V 220V, 440V AC/ DC	LSTLLR	188/-	10	
30.	3 Position Illuminated Selector Actuator with integral circuit LED Dimension : Suitable for panel cutout size 22.5mm Body material : Non flammable, non-hydroscopic, corrosion resistant glass filled thermoplast material, voltage : 6V, 12V, 24V, 48V, 63V 110V 220V, 440V AC/ DC	LST2LS	264/-	10	

REMOTE CONTROL UNIT IN SERIES "SS" (415V 50 HZ CUTOUT DIA 30.5MM)

Sl. No.	Description	Cat. No.	Unit Price (RS.)	Std. Pkg. (No's)	Product Picture
31.	Shrouded Actuator, oil tight RED, GREEN, YELLOW, BLUE BLACK	SSTS	127/-	20	
32.	Mushroom Actuator oil tight RED, GREEN, YELLOW, BLUE BLACK	SSTM	136/-	10	
33.	Stayput Mushroom head push button with press to lock and turn to reset RED, GREEN,	SSTP	163/-	10	
34.	Key Actuator lockable in unpressed and key removable in unpressed position	SSTL-1	514/-	10	
35.	Key Actuator lockable in pressed and key removable in pressed position	SSTL-2	514/-	10	
36.	Key Actuator lockable in pressed & unpressed and key removable in both position.	SSTL-3	514/-	10	
37.	Contact Element for wire connection at front 1NO+ 1NC or 2NO or 2NC with carrier.	STS-1R	182/-	20	

STS Pilot Light Unit Type of voltage AC/DC Series "SPL"





38	Pilot Light unit suitable for bayonet filament bulb & threaded type lens Cutout dia 30.5 mm rating 230/110/ 63.5/ 24V without resistance or with resistance of 3KW/1.5KW/1kW/400W/100W Red, Green, Yellow, Amber, Blue, White, Clear	SPL-10	166/-	10	
		SPL-10R	174/-	10	
39	Pilot Light unit in metal body suitable for bayonet filament bulb Cutout dia 30.5 mm rating 230/ 110/ 63.5/ 24V with plastic lens without or with resistance of 3k ϕ / 1.5k ϕ /1k ϕ /400 ϕ 100 ϕ Red, Green, Yellow, Amber, Blue, White, Clear	SPL-16 SPL-16R	169/- 191/-	10	
40	Pilot Light unit in metal Body suitable for Screw type Filament bulb Cutout dia 30.5 mm rating 230/ 110/ 63.5/ 24V with plastic lens without or with resistance of 3k ϕ / 1.5k ϕ /1k ϕ /400 ϕ 100 ϕ Red, Green, Yellow, Amber, Blue, White, Clear	SPL-17 SPL-17R	169/- 192/-	10	
41	Pilot Light unit in metal body suitable for pin type filament bulb in 220/110/64/ 24V without or with resistance of 3K ϕ / 1.5K ϕ /1K ϕ /400 ϕ /100 ϕ with glass lens Red, Green, Yellow, Amber, Blue, White, Clear	SPL-18 G/S	293/-	10	
		SPL-18R G/S	203/-		
42	Pilot Light unit in metal body suitable for screw type filament bulb in 220/110/64/ 24V without or with resistance of 3K ϕ / 1.5K ϕ /1K ϕ /400 ϕ /100 ϕ with glass lens Red, Green, Yellow, Amber, Blue, White, Clear	SPL-19 G/S	184/-	10	
		SPL-19R G/S	204/-		

STS INDICATING LIGHT UTILIZING LIGHT EMITTING DIODES(LEDs)

43	Pilot Light body with integral circuit and cluster LED Module, Dimension :- suitable for panel cutout size 8.5, 10.0, 14.5 & 16.5 mm Body Material :- Non-flammable, non-hydroscopic, corrosion resistant Glass filled thermoplast material, Voltage 6,12 24,48, 63, 110, 230, 440 V AC/DC RED, GREEN, YELLOW, AMBER, BLUE, WHITE, CLEAR	LSM-85	165/-	10	
		LSM-100	165/-		
		LSM-145	165/-		
		LSM-165	165/-		
		LSM-165	165/-		
44	Pilot Light body with integral circuit and cluster LED Module, Dimension: suitable for panel cutout size 19.5, 22.5 mm Body Material :- Non-flammable, non-hydroscopic, corrosion resistant Glass filled thermoplast material, Voltage 6,12 24,48, 63, 110, 230, 440 V AC/DC RED, GREEN, YELLOW, AMBER, BLUE, WHITE, CLEAR	LSS-225	173/-	10	
		LSS-300	173/-		
45	Pilot Light, with integral circuit and cluster LED Module, suitable for panel cutout Dia 10.5, 14.5 & 16.5 mm body material:- non-flammable, non hydroscopic, corrosion resistant brass material suitable for 6,12, 24, 48,63.5, 110,230,440 V AC/DC RED, GREEN, YELLOW, AMBER, BLUE, WHITE, CLEAR	LED MM-145	198/-	10	
46	Pilot Light, with integral circuit and cluster LED Module, suitable for panel cutout Dia 22.5mm body material:-non-flammable, non hydroscopic, corrosion resistant glassfilled thermoplast material with metal adapter suitable for 6,12, 24,48,63,110, 230, 440 V AC/DC RED, GREEN, YELLOW, AMBER, BLUE, WHITE, CLEAR	LSTLED	176/-	10	
47	Pilot Light, with integral circuit and cluster LED Module, suitable for panel cutout Dia 22.5mm body material:-non-flammable, non hydroscopic, corrosion resistant Dough Moulding compound (DMC) Voltage 6,12, 24,48,63,110, 230, 440 V AC/DC RED, GREEN, YELLOW, AMBER, BLUE, WHITE, CLEAR	LSS125	150/-	10	
48	Pilot Light, with integral circuit and cluster LED Module, suitable for panel cutout Dia 22.5mm body material:-non-flammable, non hydroscopic, corrosion resistant Voltage 6V-230V AC/DC RED, GREEN, YELLOW, AMBER, BLUE, WHITE, CLEAR	ST-ECHO	110/-	10	
49	Pilot Light, with integral circuit and cluster LED Module, suitable for panel cutout Dia 22.5mm Barrel Type body material:- non-flammable, non-hydroscopic, Corrosion resistant Glass filled thermoplast material Multi Voltage 24V- 240 V AC/DC RED, GREEN, YELLOW, AMBER, BLUE, WHITE, CLEAR	STMVR	209/-	10	
50	Pilot Light, with integral circuit and cluster LED Module, suitable for panel cutout Dia 22.5/30.5mm body material:- non-flammable, non hydroscopic, Corrosion resistant Glass filled thermoplast material Voltage 24V to 240 V AC/DC Red, Green, Yellow, Amber, Blue, White, Clear	STMV	233/-	10	

Note: The rate @ 82.00 per pc. will be charged extra for spl. colour i.e. blue, white, clear and @18.00 per pc. will be charged extra for DC voltage



STS LIMIT SWITCHES (2 SET OF CONTACTS) 1NO +1 NC

Sl. No.	Description	Cat. No.	Unit Price (RS.)	Std. Pkg. (No's)	Product Picture
51	Limit Switch 10 Amp. 500 V 1NO+1NC in Open execution with push rod and fully covered with protective cover normal action. (Body Material Bakelite/nylon)	SLS-1N(P)	132/-	40	
		SLS-1N(PP)	143/-		
52	Limit Switch 10 Amp. 500 V 1NO+1NC in Open execution with push rod and fully covered with protective cover Snap action interior of oil tight. (Body Material Bakelite/nylon)	SLS-1S(P)	154/-	40	
53	Limit Switch 10 Amp. 500 V 1NO+1NC in die cast aluminium housing with push rod with normal action	ELS-1N	289/-	01	
54	Limit Switch 10 Amp. 500 V 1NO+1NC in die cast Aluminium housing with push rod with snap action.	ELS-1S	302/-	01	
55	Limit Switch 10 Amp. 500 V 1NO+1NC in die cast Aluminium housing with roller lever, normal action.	ELS-1N(RL)	335/-	01	
56	Limit Switch 10 Amp. 500 V 1NO+1NC in die cast Aluminium housing with roller lever, snap action.	ELS-1S(RL)	374/-	01	



STS LIMIT SWITCHES (3 & 4 SET OF CONTACTS)

57	Limit Switch 10 Amp. 500 V 1NO+2NC in open execution with push rod and protective plastic cover	LS-12(P)	264/-	20	
58	Limit Switch 10 Amp. 500 V 1NO+2NC in Open execution with push rod and protective plastic cover	SLS-12(P)	264/-	20	
59	Limit Switch 10 Amp. 500 V 2NO+2NC in open execution with push rod and protective plastic cover	LS-22(P)	264/-	01	
60	Limit Switch 10 Amp. 500 V 2NO+2NC in open execution with push rod and protective plastic cover	SLS-22(P)	297/-	01	
61	Limit Switch 10 Amp. 500 V 1NO+2NC in open Aluminium housing with push rod	ELS-12	440/-	01	
62	Limit Switch 10 Amp. 500 V 2NO+1NC in die cast Aluminium housing with push rod.	ELS-21	460/-	01	
63	Limit Switch 10 Amp. 500 V 2NO+2NC in die cast Aluminium housing with push rod.	ELS-22	440/-	01	
64	Limit Switch 10 Amp. 500 V 1NO+2NC in die cast Aluminium housing with roller lever normal type	ELS-12(RL)	495/-	01	
65	Limit Switch 10 Amp. 500 V 2NO+1NC in die cast Aluminium housing with roller lever, normal type	ELS-21(RL)	495/-	01	
66	Limit Switch 10 Amp. 500 V 2NO+2NC in die cast Aluminium housing with roller lever, normal type	ELS-22(RL)	561/-	01	

STS LIMIT SWITCHES (OIL TIGHT WITH 2 SET OF CONTACTS)-(1NO+1NC)

67	Limit Switch 10 Amp. 500 V 1NO+1NC in die cast Aluminium housing with roller lever, normal action.	OLSE-10(N)	413/-	01	
68	Limit Switch 10 Amp. 500 V 1NO+1NC in die cast Aluminium housing with roller lever, snap action.	OLSE-10(S)	434/-	01	
69	Limit Switch 10 Amp. 500 V 1NO+1NC in die cast Aluminium housing with push rod without roller lever, normal action	OLSE-19(N)	375/-	01	
70	Limit Switch 10 Amp. 500 V 1NO+1NC in die cast Aluminium housing with push rod without roller lever, snap action	OLSE-19(S)	385/-	01	







STS LIMIT SWITCHES (OIL TIGHT WITH 3/4 SET OF CONTACTS)

71	Limit Switch 10 Amp. 500 V 1NO+ 2NC / 2NO+1NC / 2NO+2NC in die cast Aluminium housing with push rod & with roller lever, normal action	OLSE -19 -12/21	561/-	01	
		OLSE -19 22	610/-		
72	Limit Switch 10 Amp. 500 V 1NO+2NC/ 2NO+1NC / 2NO+2NC in die cast Aluminium housing with roller lever, normal action.	OLSE-19 RL -12/21	600/-	01	
		OLSE-19 RL 22	650/-		





STS MINI SIZE LIMIT SWITCH (WITH ALUMINIUM CASTING)

73	Limit Switch 10 Amp. 500 V 1NO+1NC in Open execution with push rod and fully covered with protective cover normal action. for mini size	MLS-1N	154/-	40	
74	Limit Switch 10 Amp. 500 V 1NO+1NC in Open execution with push rod and fully covered with protective cover snap action. for mini size	MLS-1S	168/-	40	
75	Limit Switch 10 Amp. 500 V 1NO+1NC in open Aluminium housing with Push Pin normal type mini size	MLS-PRN	360/-	1	
76	Limit Switch 10 Amp. 500 V 1NO+1NC in open Aluminium housing with Push Pin Snap type mini size	MLS-PRS	382/-	1	
77	Limit Switch 10 Amp. 500 V 1NO+1NC in open Aluminium housing with Top Push Roller Lever normal type mini size	MLS-RRN	402/-	1	
78	Limit Switch 10 Amp. 500 V 1NO+1NC in open Aluminium housing with Top Push Roller Lever Snap type mini size	MLS-RRS	426/-	1	
79	Limit Switch 10 Amp. 500 V 1NO+1NC in open Aluminium housing with Bracket Roller Lever normal type mini size	MLS-BRN	426/-	1	
80	Limit Switch 10 Amp. 500 V 1NO+1NC in open Aluminium housing with Bracket Roller Lever Snap type mini size	MLS-BRS	445/-	1	





STS PUSH BUTTON STATION (with "ST" Series Actuators & contact element)

Sl. No.	Description	Cat. No.	Unit Price (RS.)	Std. Pkg. (No's)	Product Picture
81	Cast Aluminium housing with standard knob for surface mounting and 1NO or 1NC contact arrangement in one unit in 22.5 mm dia series of "ST", 1 way	PTR-1	407/-	01	
82	Cast Aluminium housing with standard knob for surface mounting and 1NO or 1NC contact arrangement in one unit in 22.5 mm dia series of "ST", 2 way	PTR-2	575/-	01	
83	Cast Aluminium housing with standard knob for surface mounting and 1NO or 1NC contact arrangement in one unit in 22.5mm dia series of "ST", 3 way	PTR-3	744/-	01	
84	Cast Aluminium housing with standard knob for surface mounting and 1NO or 1NC contact arrangement in one unit in 22.5 mm dia series of "ST", 4 way	PTR-4	942/-	01	
85	Cast Aluminium housing with standard knob for surface mounting and 1NO or 1NC contact arrangement in one unit in 22.5 mm dia series of "ST", 6 way	PTR-6	1377/-	01	
86	Cast Aluminium housing with standard knob for surface mounting and 1NO or 1NC contact arrangement in one unit in 22.5 mm dia series of "ST", 8 way	PTR-8	1763/-	01	












STS PUSH BUTTON STATION (with "SS" Series Actuators & contact element)

87	Cast Aluminium housing with standard knob for surface mounting and 1NO+1NC or 1NO or 1NC contact arrangement in one unit in 30.5 mm dia series of "SS", 1 way	PB-1819	613/-	01	
88	Cast Aluminium housing with standard knob for surface mounting and 1NO+1NC or 1NO or 1NC contact arrangement in one unit in 30.5 mm dia series of "SS", 2 way	PB-1829	962/-	01	
89	Cast Aluminium housing with standard knob for surface mounting and 1NO+1NC or 1NO or 1NC contact arrangement in one unit in 30.5 mm dia series of "SS", 3 way	PB-1839	1298/-	01	
90	Cast Aluminium housing with standard knob for surface mounting and 1NO+1NC or 1NO or 1NC contact arrangement in one unit in 30.5 mm dia series of "SS", 4 way	PB-1849	1631/-	01	

STS PUSH BUTTON STATION (with "SA" Series Actuators & contact element)

91	Cast Aluminium housing with standard knob for surface mounting and 1NO+1NC or 1NO or 1NC contact arrangement in one unit in 30.5 mm dia series of "SA", 1 way	PB-1919	657/-	01	
92	Cast Aluminium housing with standard knob for surface mounting and 1NO+1NC or 1NO or 1NC contact arrangement in one unit in 30.5 mm dia series of "SA", 2 way	PB-1929	1006/-	01	
93	Cast Aluminium housing with standard knob for surface mounting and 1NO+1NC or 1NO or 1NC contact arrangement in one unit in 30.5 mm dia series of "SA", 3 way	PB-1939	1342/-	01	
94	Cast Aluminium housing with standard knob for surface mounting and 1NO+1NC or 1NO or 1NC contact arrangement in one unit in 30.5 mm dia series of "SA", 4 way	PB-1949	1675/-	01	



STS PUSH BUTTON STATION (Pendent type) (with "ST" series Actuators & contact element)

95	Cast Aluminium housing Pendent type Push Button Station with actuator and 1NO or 1NC contact arrangement in one unit in 22.5 mm dia series of "ST", 1 way	PB-P1	544/-	01	
96	Cast Aluminium housing Pendent type Push Button Station with actuator and 1NO or 1NC contact arrangement in one unit in 22.5 mm dia series of "ST", 2 way	PB-P2	814/-	01	
97	Cast Aluminium housing Pendent type Push Button Station with actuator and 1NO or 1NC contact arrangement in one unit in 22.5 mm dia series of "ST", 3 way	PB-P3	1028/-	01	
98	Cast Aluminium housing Pendent type Push Button Station with actuator and 1NO or 1NC contact arrangement in one unit in 22.5 mm dia series of "ST", 4 way	PB-P4	1309/-	01	
99	Cast Aluminium housing Pendent type Push Button Station with actuator and 1NO or 1NC contact arrangement in one unit in 22.5 mm dia series of "ST", 5 way	PB-P5	1584/-	01	
100	Cast Aluminium housing Pendent type Push Button Station with actuator and 1NO or 1NC contact arrangement in one unit in 22.5 mm dia series of "ST", 6 way	PB-P6	1892/-	01	
101	Cast Aluminium housing Pendent type Push Button Station with actuator and 1NO or 1NC contact arrangement in one unit in 22.5 mm dia series of "ST", 8 way	PB-P8	2343/-	01	
102	Cast Aluminium housing Pendent type Push Button Station with actuator and 1NO or 1NC contact arrangement in one unit in 22.5 mm dia series of "ST", 10 way	PB-P10	2872/-	01	
103	Cast Aluminium housing Pendent type Push Button Station with actuator and 1NO or 1NC contact arrangement in one unit in 22.5 mm dia series of "ST", 12 way	PB-P12	3575/-	01	
104	Cast Aluminium housing Pendent type Push Button Station with actuator and 1NO or 1NC contact arrangement in one unit in 22.5 mm dia series of "ST", 16 way	PB-P16	3883/-	01	
105	Cast Aluminium housing Pendent type Push Button Station with actuator and 1NO or 1NC contact arrangement in one unit in 22.5 mm dia series of "ST", 18 way	PB-P18	4356/-	01	





STS H.R.C. FUSE BASE & CARRIER (CLOSE TYPE)

106	20 /AMPs fuse base and carriers suitable for front connection	SNH-20	82/-	10	
107	20/32 AMPs fuse base and carriers suitable for front connection with Channel clamp	SNH-20/32(C)	121/-	10	
108	20/32 AMPs fuse base and carriers suitable for bus bar connection	SNB-20/32	99/-	10	
109	20/32AMPs fuse base and carriers suitable for rear connection	SNP-20/32	134/-	10	
110	32AMPs fuse base and carriers suitable for front connection	SMF-32	149/-	05	
111	32 AMPs fuse base and carriers suitable for bus bar connection	SMB-32	169/-	05	
112	63 AMPs fuse base and carriers suitable for front connection	SMF-63	209/-	05	
113	63 AMPs fuse base and carriers suitable for bus bar connection	SMB-63	242/-	05	
114	125 AMPs fuse base and carriers suitable for Front connection	SMF-125	517/-	01	
115	125 AMPs fuse base and carriers suitable for bus bar connection	SMB-125	583/-	01	

STS LOCKABLE TYPE H.R.C. FUSE FITTING (20/32A)-415V


116	20/32A Dual Mounting HRC Fuse Holder suitable to accommodate blade tag NS fuse link as well as shorting fuse fitted with engage / disengage type lift carrier colour Black or White	SNF-20/32	169/-	10	
117	20/32 Amps fuse link.	SNFL-20/32	40/-	10	

STS H.R.C. FUSE BASE FITTING (OPEN TYPE) (100A,250A,400A & 630A)


118	100Amps Bakelite fuse base open type with circlip contacts	SFB-00	162/-	01	
119	250 Amps bakelite fuse base open type with circlip/Spring loaded contacts	SFB-01	496/-	01	
120	400 Amps bakelite fuse base open type with circlip/Spring loaded contacts	SFB-02	734/-	01	
121	630 Amps bakelite fuse base open type with circlip/Spring loaded contacts	SFB-03	1111/-	01	

Note :- The rate @ of 25% on the list price will be charged extra For DMC material


STS MULTI VOLTAGE SOLID STATE BUZZER 3 TONE

122	Solid State Buzzer 3 Tone operating multi voltage 12V-30V, AC/DC, & operating voltage 12V, 24V, 30V, 48V, 63V, 110V 220V AC/DC, output 1W-3W/90-120 db, range 50 meter Front Buzzer 96x96 mm Suitable panel cutout 92x92 mm	SBMV-96	640/-	01	
-----	---	---------	-------	----	---




STS INDUSTRIAL HOOTERS -AC/DC

123	Panel Mounted Hooter operating voltage 12V, 24V, 30V, 48V, 60V, 110V, 230V AC, 50Hz range 50 Mtrs. Sound level 95 db to 120db	SH-AC	511/-	01	
124	Panel Mounted Hooter operating voltage 12V, 24V, 30V, 48V, 60V, 110V, 220V DC, range 50 Mtrs. Sound level 95 db to 120db	SH-DC	635/-	01	


STS ELECTRO MAGNETIC BUZZER

25	Electro Magnetic Buzzer operating voltage 12V, 24V, 110V, 240V AC, 50Hz size 10 cms (4")	SBZ-AC SBZ-DC	650/-	01	
----	--	------------------	-------	----	---


STS GONG BELL (HEAVY DUTY TYPE "GB")

Sl. No.	Description	Cat. No.	Unit Price (RS.)	Std. Pkg.	Product Picture
126	Single Phase Voltage 12V,24V,48V,63V,110V,230V AC, 50 Hz size 4" (10CM) Range -50 meter sound Level 95 to 120 db in Die cast Aluminium body	SGB-AC	775/-	01	
127	Single Phase Voltage 12V,24V,48V,63V,110V,220V DC, Size 6" (15CM) Range -50 meter sound Level 95 to 120 db in Die cast Aluminium body	SGB-DC	928/-	01	
128	Railway Signal Bell 110VDC Size 4" (10CM) Range -560 Mt. sound Level 95 to 120 db in Die cast Aluminium body alarm signal bell	SSPB-110D	634/-	01	

STS REVERSE FORWARD SWITCH CAM OPERATED

Sl. No.	DESCRIPTION	AMP.	Cat No.	unit price Rs.	
129	REVERSE FORWARD SWITCH CAM OPERATED	16 AMP.	STRF16	322.00	
130	REVERSE FORWARD SWITCH CAM OPERATED	25 AMP.	STRF25	604.00	
131	REVERSE FORWARD SWITCH CAM OPERATED	32 AMP.	STRF32	998.00	

















STS DIGITAL AMPMETER & VOLTMETER

Sl. No.	STANDARD RANGE 96 X 96, 72 x 72 mm	Cat No.	unit price Rs.	
132	DIGITAL VOLTMETER [0-1000V]	STVM-1	872.00	
133	DIGITAL AMMETER 0-30 A DIRECT AND ALL SUITABLE RANGES FOR C.T. OPERATED METER [5 AMP TO 5000/5]	STAM-1	872.00	
134	DIGITAL FREQUENCY METER	STFM-1	788.00	





STS TERMINAL STRIP OPEN TYPE (IN BAKELITE, SERIES OF "TS")

Sl. No.	Description	Cat. No.	Unit Price (RS.)	Std. Pkg.	Product Picture
135	Bakelite terminal strip open type 15 Amps 2 way	STS-BO15/2	22/-	50	
136	Bakelite terminal strip open type 15 Amps 3 way	STS-BO15/3	28/-	20	
137	Bakelite terminal strip open type 15 Amps 4 way	STS-BO15/4	34/-	20	
138	Bakelite terminal strip open type 15 Amps 6 way	STS-BO15/6	40/-	20	
139	Bakelite terminal strip open type 15 Amps 8 way	STS-BO15/8	53/-	10	
140	Bakelite terminal strip open type 15 Amps 10 way	STS-BO15/10	66/-	10	
141	Bakelite terminal strip open type 15 Amps 12 way	STS-BO15/12	79/-	10	
142	Bakelite terminal strip open type 15 Amps 16 way	STS-BO15/16	105/-	10	
143	Bakelite terminal strip open type 30 Amps 2 way	STS-BO30/2	30/-	20	
144	Bakelite terminal strip open type 30 Amps 3 way	STS-BO30/3	41/-	20	
145	Bakelite terminal strip open type 30 Amps 4 way	STS-BO30/4	51/-	20	
146	Bakelite terminal strip open type 30 Amps 5 way	STS-BO30/5	62/-	10	
147	Bakelite terminal strip open type 30 Amps 6 way	STS-BO30/6	73/-	10	
148	Bakelite terminal strip open type 30 Amps 8 way	STS-BO30/8	94/-	10	
149	Bakelite terminal strip open type 30 Amps 10 way	STS-BO30/10	115/-	10	
150	Bakelite terminal strip open type 30 Amps 12 way	STS-BO30/12	136/-	10	
151	Bakelite terminal strip open type 60 Amps 2 way	STS-BO60/2	53/-	20	
152	Bakelite terminal strip open type 60 Amps 3 way	STS-BO60/3	75/-	20	
153	Bakelite terminal strip open type 60 Amps 4 way	STS-BO60/4	96/-	20	
154	Bakelite terminal strip open type 60 Amps 6 way	STS-BO60/6	139/-	10	






STS TERMINAL STRIP OPEN & CLOSE TYPE (IN BAKELITE, SERIES OF "TS")

Sl. No.	Description	Cat. No.	Unit Price (RS.)	Std. Pkg.	Product Picture
155	Bakelite terminal strip open type 60 Amps 8 way	STS-BO60/8	182/-	10	
156	Bakelite terminal strip open type 60 Amps 10 way	STS-BO60/10	225/-	10	
157	Bakelite terminal strip open type 60 Amps 12 way	STS-BO60/12	268/-	10	
158	Bakelite terminal strip open type 100 Amps 4 way	STS-BO100/4	193/-	10	
159	Bakelite terminal strip close type 6 Amps 12 way	STS-BC6/12	51/-	50	
160	Bakelite terminal strip close type 10 Amps 12 way	STS-BC10/12	64/-	20	
161	Bakelite terminal strip close type 15 Amps 2 way	STS-BC15/2	22/-	50	
162	Bakelite terminal strip close type 15 Amps 6 way	STS-BC15/6	48/-	20	
163	Bakelite terminal strip close type 15 Amps 12 way	STS-BC15/12	96/-	20	
164	Bakelite terminal strip close type 30 Amps 2 way	STS-BC30/2	32/-	20	
165	Bakelite terminal strip close type 30 Amps 3 way	STS-BC30/3	43/-	20	
166	Bakelite terminal strip close type 30 Amps 4 way	STS-BC30/4	54/-	10	
167	Bakelite terminal strip close type 30 Amps 6 way	STS-BC30/6	75/-	10	
168	Bakelite terminal strip close type 30 Amps 8 way	STS-BC30/8	96/-	10	
169	Bakelite terminal strip close type 30 Amps 10 Way	STS-BC30/10	118/-	10	
170	Bakelite terminal strip close type 30 Amps 12 Way	STS-BC30/12	139/-	10	

STS TERMINAL STRIP (IN PVC) SERIES OF "TS" CLOSE TYPE

171	PVC terminal strip close type 6 Amps 12 way	STS-PC6/12	51/-	50	
172	PVC terminal strip close type 10 Amps 12 way	STS-PC10/12	64/-	50	
173	PVC terminal strip close type 15 Amps 12 way	STS-PC15/12	89/-	50	
174	PVC terminal strip close type 30 Amps 12 way	STS-PC30/12	118/-	20	

STS TERMINAL BLOCK Terminal Strip - ("TB" type)

Sl. No.	Description	Cat. No.	Unit Price (RS.)	Std. Pkg.	Product Picture
175	Terminal block bakelite 30 Amps	STB-30	41/-	20	
176	End plate for 30 Amps terminal block	STE-30	21/-	10	
177	Terminal block bakelite 60 Amps	STB-60	51/-	20	
178	End plate for 60 Amps terminal block	STE-60	26/-	10	
179	Terminal block bakelite 100 Amps	STB-100	77/-	10	
180	End plate for 100 Amps terminal block	STE-100	30/-	10	

Note :- The rate @ of 25% on the list price will be charged extra if the 6 terminal strip and the terminal block will be require in DMC material

STS FOOT SWITCHES

Conforming to IS/IEC-60947 Pt-5 Sec-1 2004


181	Heavy duty foot switch with guard and 1NO+1NC contact arrangement	SFS-11	2100/-	01	
182	Heavy duty foot switch without guard and 1NO+1NC contact arrangement	SFS-11H	1661/-	01	
183	Contact Block for 2 position 1NO + 1NC or 2NO+2NC for heavy duty foot switch	SFE-1	390/-	20	
184	Precision Limit Switch 2 position 1NO + 1NC or 2NO+2NC for heavy duty foot switch with Push Roller	SFE-1PR	720/-	20	
185	Light duty foot switch OFF-ON 10Amps 250V AC/DC with NO or NC contact Single element	SFMC0-10	484/-	01	
186	Contact Block for 2 position 1NO + 1NC/ 1Position 1 NO or 1NC for Light duty foot switch	SFLE-1	220/-	20	

MS CHANNEL, END CLAMP & PROTECTIVE COVER PANEL SPARE ACCESSORIES

187	MS end clamp for terminal	SEC-T	4.40/-	500	
188	MS end clamp for MCB	SEC-M	7.70/-	200	
189	Resistor 3K Ω / 1K Ω /400 Ω /100 Ω	AS PER DETAIL	15.40/-	10	
190	Heavy duty foot switch with guard and 1NO+1NC contact arrangement	SSTS-B	33/-	10	
191	Spare bracket with fixing screw for STR-1R	STR-B	16.50/-	10	
192	Limit Switch plastic roller lever for 22.5 mm push button	RLA-MLS	132/-	10	
193	Limit Switch roller assembly for OLSE-10N	RLA-ELS	132/-	10	
194	Precision Limit Switch Push Button Roller for SFE-1RL	RLA-SFE	330/-	10	


STS NEUTRAL LINK

Conforming to IS/IEC-60947 Pt-5 Sec-1 2004

Sl. No.	Particular & Size	Cat No.	unit price Rs.	Product Picture
195	Neutral Link 16/32A	STNL16/32	44/-	
196	Neutral Link 16/32A with Protective cover,channel clamp	STNLP16/32	99/-	
197	Neutral Link 63A	STNL-63	99/-	
198	Neutral Link 100A	STNL-100	231/-	
199	Neutral Link 200A	STNL-200	496/-	


STS- SHUNT

Conforming to IS-1248 Pt-2 2003

S. No.	Description	Rate	Product Picture
1	10 to 30Amp	247.00	
2	50Amp	264.00	
3	75Amp	297.00	
4	100Amp	285.00	
5	150Amp	451.00	
6	200Amp	599.00	
7	300Amp	841.00	
8	400Amp	1001.00	
9	500Amp	1166.00	
10	600Amp	1210.00	
11	700Amp	1391.00	
12	800Amp	1578.00	
13	1000Amp	1837.00	
14	1200Amp	2222.00	
15	1500Amp	2667.00	
16	2000Amp	3410.00	
17	3000Amp	4334.00	
18	4000Amp	7815.00	
19	5000Amp	11929.00	
20	6000Amp	13216.00	


STS B.P.L. TYPE CURRENT TRANSFORMERS 5 VA, 10VA, 15VA

Conforming to IS:2705-1992


	DESCRIPTION	Rating	Cat No.	Tape wound C.T (Unit Price)	Epoxy C.T.	
1.	30,50,60,75,100,150,200/5A	5 VA	STCT-1	225/-	546/-	
2.	30,50,60,75,100,150,200/5A	15VA	STCT-2	300/-	621/-	
3.	250/5A	15 VA	STCT-3	242/-	670/-	
4.	300/5A	15 VA	STCT-4	242/-	670/-	
5.	400/5A	15 VA	STCT-5	266/-	801/-	
6.	500,600/5A	15 VA	STCT-6	286/-	1035/-	
7.	800/5A	15 VA	STCT-7	336/-	1298/-	
8.	1000/5A	15 VA	STCT-8	346/-	1464/-	
9.	1200/5A	15 VA	STCT-9	383/-	1667/-	
10.	1500,1600/5A	15 VA	STCT-10	502/-	1895/-	
11.	2000,2500/5A	15 VA	STCT-11	597/-	2737/-	
12.	3000/5A	15 VA	STCT-12	965/-	4592/-	
13.	4000/5A	15 VA	STCT-13	1381/-	6731/-	
14.	5000/5A	15 VA	STCT-14	1658/-	9148/-	

STS PLUG & SOCKET WITH STEEL SHEET ENCLOSURES [AC BOX]

Conforming to IS/IEC-60947 Pt-5 Sec-1 2004

Sl. No.	DESCRIPTION	AMP.	Cat No.	unit price Rs.	
POWDER COATING WITH NEUTRAL LINK [WITHOUT MCB] WITH PLUG & SOCKET					
1.	10 AMP	250V	ST-PS/SP1	585/-	
2.	20 AMP	440V	ST-PS/TP2	962/-	

STS METAL CLAD, PLUGS & SOCKETS

250V, 2 POLE & EARTH					
1.	10 AMP. PLUG	30	STP-1	99/-	
2.	10 AMP. SOCKET WITH CAP	30	STS-1	105/-	
3.	20 AMP. PLUG	20	STP-2	105/-	
4.	20 AMP. SOCKET WITH CAP	20	STS-2	116/-	
440V, 3 POLE & EARTH					
1.	20 AMP. PLUG	30	STP-3	149/-	
2.	20 AMP. SOCKET WITH CAP	30	STS-3	160/-	
3.	30 AMP. PLUG	20	STP-4	297/-	
4.	30 AMP. SOCKET WITH CAP	20	STS-4	319/-	

STS DMC CONICAL SUPPORTS

Sl. No.	Particular & Size	Cat No.	unit price (RS.)	Product Picture
1	Conical Support 25x 25 (M6)	STS-25X25-6	16/-	
2	Conical Support 30x 30 (M6)	STS-30X30-6	18/-	
3	Conical Support 30x 30 (M8)	STS-30X30-8	23/-	
4	Conical Support 35x 35 (M6)	STS-35X35-6	26/-	
5	Conical Support 40x 40 (M8)	STS-40X40-8	33/-	
6	Conical Support 40x 40 (M10)	STS-40X40-10	42/-	
7	Conical Support 50x 50 (M10)	STS-50X50-10	61/-	
8	Conical Support 50x 50 (M12)	STS-50X50-12	85/-	
9	Conical Support 60x 50 (M12)	STS-60X50-12	99/-	
10	Conical Support 60x 60 (M12)	STS-60X60-12	115/-	
11	Conical Support 70x 50 (M12)	STS-70X50-12	115/-	
12	Conical Support 80x 55 (M12)	STS-80X55-12	135/-	
13	Conical Support 90x 55 (M12)	STS-90X55-12	145/-	
14	Conical Support 100x 60 (M12)	STS-100X60-12	171/-	

STS DMC H.T. INSULATOR

Sl. No.	Particular & Size	Cat No.	unit price (RS.)	Product Picture
1.	H.T. Insulator 2.2KV	ST-HT-2.2	214/-	
2.	H.T. Insulator 3.3KV	STS-HT-3.3	247/-	
3.	H.T. Insulator 6.6 KV	STS-HT-6.6	280/-	
4.	H.T. Insulator 11 KV 75 x130	STS-HT-11-75	511/-	
5.	H.T. Insulator 11 KV 60 x130	STS-HT-11-60	561/-	

STS DMC T.P.N SUPPORT

1.	TPN Support SMC107/30	STS-107/30	138.00	
2.	TPN Support SMC111/30	STS-111/30	138.00	
3.	TPN Support SMC114/30	STS-114/30	138.00	
4.	TPN Support SMC107/35	STS-107/35	171.00	
5.	TPN Support SMC111/35	STS-111/35	171.00	
6.	TPN Support SMC114/35	STS-114/35	171.00	
7.	TPN Support SMC 207/35	STS-207/35	171.00	
8.	TPN Support SMC 211/35	STS-211/35	171.00	
9.	TPN Support SMC 214/35	STS-214/35	171.00	
10.	TPN Support SMC107/40	STS-107/40	273.00	
11.	TPN Support SMC111/40	STS-111/40	273.00	
12.	TPN Support SMC114/40	STS-114/40	273.00	
13.	TPN Support SMC 207/40	STS-207/40	273.00	
14.	TPN Support SMC 211/40	STS-211/40	273.00	
15.	TPN Support SMC 214/40	STS-214/40	273.00	
16.	TPN Support SMC107/42	STS-107/42	290.00	
17.	TPN Support SMC111/42	STS-111/42	290.00	
18.	TPN Support SMC114/42	STS-114/42	290.00	
19.	TPN Support SMC 207/42	STS-207/42	290.00	
20.	TPN Support SMC 211/42	STS-211/42	290.00	
21.	TPN Support SMC 214/42	STS-214/42	290.00	

STS DMC HEX SUPPORTS

Conforming to IS/IEC-60947 Pt-5 Sec-1 2004

Sl. No.	Particular & Size	Cat No.	unit price (RS.)	Product Picture
1	Hex Support 15H(M 4)	STS-15H-4	16/-	
2	Hex Support 20H(M 6)	STS-20H-6	17/-	
3	Hex Support 25H(M 6)	STS-25H-6	18/-	
4	Hex Support 30H(M 6)	STS-30H-6	19/-	
5	Hex Support 30H(M 8)	STS-30H-8	24/-	
6	Hex Support 35H(M 6)	STS-35H-6	27/-	
7	Hex Support 35H(M 8)	STS-35H-8	32/-	
8	Hex Support 40H(M 8)	STS-40H-8	34/-	
9	Hex Support 45H(M 8)	STS-45H-8	44/-	
10	Hex Support 50H(M 8)	STS-50H-8	54/-	
11	Hex Support 50H(M 10)	STS-50H-10	63/-	
12	Hex Support 50H(M 12)	STS-50H-12	72/-	
13	Hex Support 60H(M 10)	STS-60H-10	97/-	
14	Hex Support 60H(M 12)	STS-60H-12	116/-	

STS DMC SINGLE POLE SUPPORTS

Sl. No.	Particular & Size	Cat No.	Unit Price DMC (Rs.)	Product Picture
1.	Single Pole Supports SP-30	STS-SP- 30	12/-	
2.	Single Pole Supports SP-30NB	STS-SP-30NB	12/-	
3.	Single Pole Supports SP-35	STS-SP-35	28/-	
4.	Single Pole Supports SP-40	STS-SP-40	27/-	
5.	Single Pole Supports SP-55	STS-SP-55	99/-	
6.	Single Pole Supports SP-65	STS-SP-65	125/-	

STS DMC CYLINDRICAL SUPPORTS

Conforming to IS/IEC-60947 Pt-5 Sec-1 2004

Sl. No.	Particular & Size	Cat No.	unit price (RS.)	Product Picture
1.	CYLINDRICAL SUPPORTS 20CL (M 5)	STS-20CL	12/-	
2.	CYLINDRICAL SUPPORTS 25BH (M 6)	STS-25BH	15/-	
3.	CYLINDRICAL SUPPORTS M+F (Bush) C.T. Key	STS-MF	10/-	

STS AMMETER & VOLTMETER

Conforming to IS: 2148 Pt-2 2003

Sl. No.	DESCRIPTION	SQ. FLUSH ST-72	SQ. FLUSH ST-96	SQ. FLUSH ST-144
1.	Ammeter's any single range upto 50 AMP	152.00	243.00	354.00
2.	60-75-80-100 AMP	164.00	266.00	365.00
3.	150-200 AMP	175.00	276.00	381.00
4.	above 200-1200A	207.00	338.00	457.00
5.	Voltmeter's 15-300V	152.00	243.00	354.00
6.	500-600V	164.00	266.00	365.00

STS MOVING COIL DC AMMETER & VOLTMETER

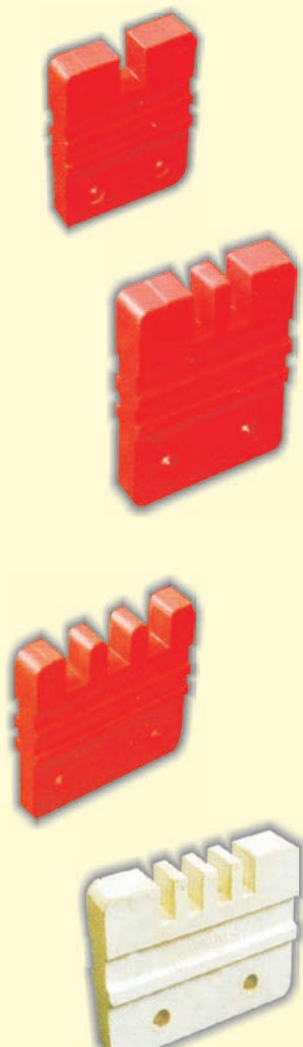
1.	0-1000v	400.00	480.00	800.00
2.	0-20A (with internal shunt)	400.00	480.00	800.00
3.	30-5000A (external shunt)	400.00	480.00	800.00

STS FREQUENCY METER


1.	Vibrating Read Type (45-50-55)	520.00	560.00	---
2.	Transducer Type(pointer Type)(45-50-55)	---	1500.00	---




STS DMC & SMC FINGER SUPPORT

Sl. No.	Particular & Size	Cat No.	Unit Price DMC (Rs.)	Unit Price SMC (Rs.)	Product Picture
1.	Finger Support 1x 6 (S)	STSF-1X6S	24.00	38/-	
2.	Finger Support 1x10 (S)	STSF-1X10S	24.00	38/-	
3.	Finger Support 1x12 (S)	STSF-1X12S	24.00	38/-	
4.	Finger Support 1x 6 (W)	STSF-1X6W	26.00	43/-	
5.	Finger Support 1x 10 (W)	STSF-1X10W	26.00	43/-	
5.	Finger Support 1x 12 (W)	STSF-1X12W	26.00	43/-	
7.	Finger Support 2x 6 (W)	STSF-2X6W	26.00	43/-	
8.	Finger Support 2x 10 (W)	STSF-2X10W	26.00	43/-	
9.	Finger Support 2x 12 (W)	STSF-2X12W	26.00	43/-	
10.	Finger support 3 x6 (W)	STSF-3X6W	26.00	43/-	
11.	Finger Support 1x 6 (K)	STSF-1X6K	43.00	73/-	
12.	Finger Support 1x 10 (K)	STSF-1X10K	43.00	73/-	
13.	Finger Support 1x 12 (K)	STSF-1X12K	43.00	73/-	
14.	Finger Support 2x 6 (K)	STSF-2X6K	43.00	73/-	
15.	Finger Support 2x 10 (K)	STSF-2X10K	43.00	73/-	
16.	Finger Support 2x 12 (K)	STSF-2X12K	43.00	73/-	
17.	Finger Support 3x 6 (K)	STSF-3X6K	43.00	73/-	
18.	Finger Support 3 x10 (W)	STSF-3X10W	43.00	73/-	
19.	Finger Support 3x 12 (W)	STSF-3X12W	43.00	73/-	
20.	Finger Support 4x 6 (W)	STSF-4X6W	43.00	73/-	
21.	Finger Support 4x 10 (W)	STSF-4X10W	43.00	73/-	
22.	Finger Support 3x 10 (K)	STSF-3X10K	64.00	102/-	
23.	Finger Support 3x 12 (K)	STSF-3X12K	64.00	102/-	
24.	Finger Support 4x 6 (K)	STSF-4X6K	64.00	102/-	
25.	Finger Support 4x 10 (K)	STSF-4X10K	64.00	102/-	
26.	Finger Support 5x 10 (K)	STSF-5X10K	64.00	102/-	
27.	Finger Support 6x 6 (K)	STSF-6 X6K	64.00	102/-	
28.	Finger Support 4 x10 (W)	STSF-4X10W	64.00	102/-	
29.	Finger Support 4x 12 (W)	STSF-4X12W	64.00	102/-	

STS DMC L TYPE SUPPORTS

Sl. No.	Particular & Size	Cat No.	Unit Price DMC (Rs.)	Unit Price SMC (Rs.)	
1	L Support L-60	STS-L60	26	39/-	
2	L Support L-85	STS-L85	29	49/-	
3	L Support L-105	STS-L105	34	59/-	
4	L Support L-125	STS-L125	37	69/-	
5	L Support L-150	STS-L-150	43	79/-	

STS DMC TERMINAL CONNECTOR

Terminal Connector TP 63A	STS-TP-63	53/-	
Terminal Connector TPN 63A	STS-TPN-63	60/-	
Terminal Connector TPN 100A	STS-TPN-100	79/-	
Terminal Connector TP-2 100A Big	STS-TP-2	106/-	
Terminal Connector TPN-2 100 A Big	STS-TPN-2	120/-	
Terminal Connector TSB-3 200 A TP	STS-TSB-3	135/-	

STS FUSE LINK TYPE STNS WITH STAGGERED TAGS 415 V AC

Sl. No.	Description	Pack	Cat No.	unit price Rs.	Product Picture
1.	TAG 2 Amp.	20	ST-NS 2	37/-	
2.	TAG 4 Amp.	20	ST-NS 4	37/-	
3.	TAG 6 Amp.	20	ST-NS 6	37/-	
4.	TAG 10 Amp.	20	ST-NS 10	37/-	
5.	TAG 16 Amp.	20	ST-NS 16	37/-	
6.	TAG 20 Amp.	20	ST-NS 20	37/-	
7.	TAG 25 Amp.	20	ST-NS 25	37/-	
8.	TAG 32 Amp.	20	ST-NS 32	37/-	

STS FUSE LINK TYPE OFFSET TAGS [2 HOLE FIXING-BOLTED]

TYPE ST-TIA - IS SIZE A1

1.	TYPE ST-TIA-660 AC OFFSET TAGS- 8 Amp	10	ST-TIA-6	71/-	
2.	TYPE ST-TIA-660 AC OFFSET TAGS- 10 Amp	10	ST-TIA-10	71/-	
3.	TYPE ST-TIA-660 AC OFFSET TAGS- 16 Amp	10	ST-TIA-16	71/-	
4.	TYPE ST-TIA-660 AC OFFSET TAGS- 20 Amp	10	ST-TIA-20	71/-	
5.	TYPE ST-TIA-660 AC OFFSET TAGS- 25 Amp	10	ST-TIA-25	71/-	
6.	TYPE ST-TIA-660 AC OFFSET TAGS- 32 Amp	10	ST-TIA-32	71/-	

STS FUSE LINK TYPE OFFSET TAGS [2 HOLE FIXING-BOLTED] Conforming to IS-13703 Pt-2 Sec-1 1993

TYPE ST-TIS - IS SIZE A3

7.	TYPE ST-TIS-660 AC OFFSET TAGS- 36 Amp	10	ST-TIS-36	78	
8.	TYPE ST-TIS-660 AC OFFSET TAGS- 50Amp	10	ST-TIS-50	78	
9.	TYPE ST-TIS-660 AC OFFSET TAGS- 63Amp	10	ST-TIS-63	78	

TYPE ST-TCP - IS SIZE A4

10.	TYPE ST-TCP-660 AC OFFSET TAGS- 80Amp	6	ST-TCP-80	189.00	
11.	TYPE ST-TCP-660 AC OFFSET TAGS- 100Amp	6	ST-TCP-100	189.00	
12.	TYPE ST-TCP-660 AC OFFSET TAGS- 125Amp	6	ST-TCP-125	214.00	

TYPE ST-TFP - IS SIZE A4

13.	TYPE ST-TFP-660 AC OFFSET TAGS- 125Amp	6	ST-TFP-125	290.00	
14.	TYPE ST-TFP-660 AC OFFSET TAGS- 160Amp	6	ST-TFP-160	290.00	
15.	TYPE ST-TFP-660 AC OFFSET TAGS- 200Amp	6	ST-TFP-200	290.00	

STS FUSE LINK TYPE STEIT WITH OFFSET TAGS 415 V AC Conforming to IS-13703 Pt-2 Sec-1 1993

1	FUSE LINK WITH OFFSET TAG 2 AMP.	20	ST-EIT-2	57	
2	FUSE LINK WITH OFFSET TAG 4 AMP.	20	ST-EIT-4	57	
3	FUSE LINK WITH OFFSET TAG 6 AMP.	20	ST-EIT-6	57	
4	FUSE LINK WITH OFFSET TAG 10 AMP.	20	ST-EIT-10	57	
5	FUSE LINK WITH OFFSET TAG 16 AMP.	20	ST-EIT-16	57	
6	FUSE LINK WITH OFFSET TAG 20 AMP.	20	ST-EIT-20	57	
7	FUSE LINK WITH OFFSET TAG 25 AMP.	20	ST-EIT-25	57	
8	FUSE LINK WITH OFFSET TAG 32 AMP.	20	ST-EIT-32	57	
9	FUSE LINK WITH OFFSET TAG 36 AMP.	20	ST-EIT-36	70	
10	FUSE LINK WITH OFFSET TAG 50 AMP.	20	ST-EIT-50	70	
11	FUSE LINK WITH OFFSET TAG 63 AMP.	20	ST-EIT-63	70	

STS FUSE LINK TYPE OFFSET TAGS [2 HOLE FIXING-BOLTED]

FUSE LINK TYPE STSA OFFSET TAGS

1	TAGS-6 AMP	6	STSA-06	58/-	
2	TAGS-10 AMP	6	STSA-10	58/-	
3	TAGS-16 AMP	6	STSA-16	58/-	
4	TAGS-20 AMP	6	STSA-20	58/-	
5	TAGS-25 AMP	6	STSA-25	58/-	
6	TAGS-32 AMP	6	STSA-32	58/-	

FUSE LINK TYPE STSS OFFSET TAGS

1	TAGS-36 AMP	6	STSS-36	70/-	
2	TAGS-50 AMP	6	STSS-50	70/-	
3	TAGS-63 AMP	6	STSS-63	70/-	

FUSE LINK TYPE STSDS OFFSET TAGS

1	TAGS-80 AMP	6	STSDS-80	130/-	
2	TAGS-100 AMP	6	STSDS-100	130/-	
3	TAGS-125 AMP	6	STSDS-125	130/-	

FUSE LINK TYPE STSD OFFSET TAGS

1	TAGS-80 AMP	6	STSD-80	143/-	
2	TAGS-100 AMP	6	STSD-100	143/-	
3	TAGS-125 AMP	6	STSD-125	143/-	

FUSE LINK TYPE STSFP OFFSET TAGS

1	TAGS-125 AMP	6	STSFP-125	229/-	
2	TAGS-160 AMP	6	STSFP-160	229/-	
3	TAGS-200 AMP	6	STSFP-200	229/-	

STS FUSE LINK TYPE ST-FR 415 V, 50 Hz.

Sl. No.	Rating AMP	Pack	Cat No.	Unit price (Rs)	Product Picture
1.	FUSE LINKS TYPE ST-FR 415 V, 50Hz. -2AMP	20	ST-FR 2A	62/-	
2.	FUSE LINKS TYPE ST-FR 415 V, 50Hz. -4AMP	20	ST-FR 4A	62/-	
3.	FUSE LINKS TYPE ST-FR 415 V, 50Hz. -6AMP	20	ST-FR 6A	62/-	
4.	FUSE LINKS TYPE ST-FR 415 V, 50Hz. -8AMP	20	ST-FR 8A	62/-	
5.	FUSE LINKS TYPE ST-FR 415 V, 50Hz. -10AMP	20	ST-FR 10A	62/-	
6.	FUSE LINKS TYPE ST-FR 415 V, 50Hz. -16AMP	20	ST-FR 16A	62/-	
7.	FUSE LINKS TYPE ST-FR 415 V, 50Hz. -20AMP	20	ST-FR 20A	62/-	
8.	FUSE LINKS TYPE ST-FR 415 V, 50Hz. -25AMP	20	ST-FR 25A	62/-	
9.	FUSE LINKS TYPE ST-FR 415 V, 50Hz. -32AMP	20	ST-FR 32A	62/-	
10.	FUSE LINKS TYPE ST-FR 415 V, 50Hz. -40AMP	20	ST-FR 40A	78/-	
11.	FUSE LINKS TYPE ST-FR 415 V, 50Hz. -50AMP	20	ST-FR 50A	78/-	
12.	FUSE LINKS TYPE ST-FR 415 V, 50Hz. -63AMP	20	ST-FR 63A	78/-	

STS FUSE LINK TYPE CENTRAL TAGS[2 HOLE FIXING-BOLTED] Conforming to IS-13703 Pt-2 Sec-1 1993

TYPE ST-TC - IS SIZE B1

1.	CENTRAL TAGS[2 HOLE FIXING-BOLTED] 80A	6	ST-TC 80	158/-
2.	CENTRAL TAGS[2 HOLE FIXING-BOLTED] 100A	6	ST-TC 100	158/-

TYPE ST-TF - IS SIZE B2

3.	CENTRAL TAGS[2 HOLE FIXING-BOLTED] 125A	6	ST-TF 125	257/-
4.	CENTRAL TAGS[2 HOLE FIXING-BOLTED] 160A	6	ST-TF 160	257/-
5.	CENTRAL TAGS[2 HOLE FIXING-BOLTED] 200A	6	ST-TF 200	257/-
6.	CENTRAL TAGS[2 HOLE FIXING-BOLTED] 250A	6	ST-TF 250	257/-

TYPE ST-TKF - IS SIZE B3

7.	CENTRAL TAGS[2 HOLE FIXING-BOLTED] 315A	6	ST-TKF 315	407/-
----	---	---	------------	-------



STS FUSE LINK TYPE CENTRAL TAGS[2 HOLE FIXING-BOLTED] Conforming to IS-13703 Pt-2 Sec-1 1993

FUSE LINK TYPE TSDC

1	CENTRAL TAGS [2 HOLE FIXING-BOLTED]-80A	6	ST-TSDC-80	143/-
2	CENTRAL TAGS [2 HOLE FIXING-BOLTED]-100A	6	ST-TSDC-100	143/-

FUSE LINK TYPE TSF

3	CENTRAL TAGS [2 HOLE FIXING-BOLTED]-125A	6	ST-TSF-125	230/-
4	CENTRAL TAGS [2 HOLE FIXING-BOLTED]-160A	6	ST-TSF-160	230/-
5	CENTRAL TAGS [2 HOLE FIXING-BOLTED]-200A	6	ST-TSF-200	230/-
6	CENTRAL TAGS [2 HOLE FIXING-BOLTED]-250A	6	ST-TSF-250	250/-

FUSE LINK TYPE TSK

7	CENTRAL TAGS [2 HOLE FIXING-BOLTED]-250A	6	ST-TSK-250	402/-
8	CENTRAL TAGS [2 HOLE FIXING-BOLTED]-315A	6	ST-TSK-315	402/-

FUSE LINK TYPE TSMS

9	CENTRAL TAGS [2 HOLE FIXING-BOLTED]-400A	3	ST-TSMS-400	710/-
10	CENTRAL TAGS [2 HOLE FIXING-BOLTED]-500A	3	ST-TSMS-500	751/-

FUSE LINK TYPE TSL

11	CENTRAL TAGS [4 HOLE FIXING-BOLTED]-630A	1	ST-TSL-630	1353/-
12	CENTRAL TAGS [4 HOLE FIXING-BOLTED]-800A	1	ST-TSL-800	1485/-



STS HRC FUSE LINK [DIN TYPE] UPTO 630A, 415V A.C., 50 Hz. BREAKING CAPACITY 80 KA

DIN TYPE SIZE 0

1.	HRC FUSES [DIN TYPE]- SIZE-00 6 AMP	3	STDN0-6	221/-
2.	HRC FUSES [DIN TYPE]- SIZE-00 10 AMP	3	STDN0-10	221/-
3.	HRC FUSES [DIN TYPE]- SIZE-00 16 AMP	3	STDN0-16	221/-
4.	HRC FUSES [DIN TYPE]- SIZE-00 20 AMP	3	STDN0-20	221/-
5.	HRC FUSES [DIN TYPE]- SIZE-00 25 AMP	3	STDN0-25	221/-
6.	HRC FUSES [DIN TYPE]- SIZE-00 32 AMP	3	STDN0-32	221/-
7.	HRC FUSES [DIN TYPE]- SIZE-00 40 AMP	3	STDN0-40	221/-
8.	HRC FUSES [DIN TYPE]- SIZE-00 50 AMP	3	STDN0-50	221/-
9.	HRC FUSES [DIN TYPE]- SIZE-00 63 AMP	3	STDN0-63	221/-
10.	HRC FUSES [DIN TYPE]- SIZE-00 80 AMP	3	STDN0-80	221/-
11.	HRC FUSES [DIN TYPE]- SIZE-00 100 AMP	3	STDN0-100	221/-
12.	HRC FUSES [DIN TYPE]- SIZE-00 125 AMP	3	STDN0-125	221/-

DIN TYPE SIZE 1

14	HRC FUSES [DIN TYPE]- SIZE-01 125 AMP	3	STDN1-125	363/-
13.	HRC FUSES [DIN TYPE]- SIZE-01 160 AMP	3	STDN1-160	363/-
15.	HRC FUSES [DIN TYPE]- SIZE-01 200 AMP	3	STDN1-200	363/-
16.	HRC FUSES [DIN TYPE]- SIZE-01 250 AMP	3	STDN1-250	363/-

DIN TYPE SIZE 2

17	HRC FUSES [DIN TYPE]- SIZE-02 315 AMP	3	STDN2-315	520/-
18.	HRC FUSES [DIN TYPE]- SIZE-02 400 AMP	3	STDN2-400	567/-

DIN TYPE SIZE 3



























19	HRC FUSES [DIN TYPE]- SIZE-03 500 AMP	3	STDN3-500	751/-
20.	HRC FUSES [DIN TYPE]- SIZE-03 630 AMP	3	STDN3-630	792/-



















DIN TYPE SIZE 4

21.	HRC FUSES [DIN TYPE]- SIZE-04 800 AMP	3	STDN4-800	946/-
-----	---------------------------------------	---	-----------	-------





STS CAM OPERATED ROTARY SWITCHES (6 AMPS.)



Sl. No.	Switching	Pole	Cat No.	Unit price (Rs)	Product Picture
1	ON-OFF (60°) 	1 2 3 4	ST001 ST002 ST003 ST004	99/- 124/- 135/- 163/-	
2	TWO WAY NO-OFF(90°) 	1 2 3 4	ST037 ST038 ST039 ST040	124/- 162/- 194/- 243/-	
3	TWO WAY WITH OFF(60°) 	1 2 3 4	ST025 ST026 ST027 ST028	147/- 168/- 183/- 237/-	
4	THREE WAY NO-OFF(60°) 	1 2 3 4	ST049 ST069 ST089 ST120	165/- 183/- 303/- 363/-	
5	THREE WAY WITH OFF(90°) 	1 2 3 4	ST060 ST080 ST100 ST131	153/- 183/- 303/- 363/-	
6	FOUR WAY NO-OFF(90°) 	1 2 3 4	ST050 ST070 ST090 ST121	168/- 147/- 363/- 417/-	
7	FOUR WAY WITH OFF(60°) 	1 2 3 4	ST061 ST081 ST101 ST132	168/- 237/- 363/- 417/-	
8	FIVE WAY WITH OFF(60°) 	1 2 3	ST051 ST071 ST091	183/- 348/- 417/-	
9	FIVE WAY NO-OFF (60°) 	1 2 3	ST062 ST082 ST102	183/- 348/- 417/-	
10	SIX WAY WITH NO-OFF (60°) 	1 2 3	ST052 ST072 ST092	183/- 363/- 483/-	
11	SIX WAY WITH OFF(45°) 	1 2 3	ST063 ST083 ST103	256/- 444/- 596/-	
12	SEVEN WAY NO-OFF(45°) 	1 2 3	ST064 ST084 ST104	256/- 444/- 595/-	
13	SEVEN WAY WITH OFF(45°) 	1 2 3	ST053 ST073 ST093	256/- 444/- 638/-	

14	EIGHT WAY WITH NO-OFF(45°) 	1 2 3	ST054 ST074 ST094	266/- 482/- 645/-	
15	EIGHT WAY WITH OFF(30°) 	1 2	ST065 ST085	294/- 488/-	
16	NINE WAY WITH NO-OFF(30°) 	1 2	ST055 ST075	313/- 525/-	
17	NINE WAY WITH OFF(30°) 	1 2	ST066 ST086	312/- 593/-	
18	TEN WAY WITH OFF (30°) 	1 2	ST056 ST076	331/- 571/-	
19	TEN WAY WITH NO-OFF (30°) 	1 2	ST067 ST087	525/- 616/-	
20	TWELVE WAY WITH ON-OFF(30°) 	1 2	ST058 ST078	381/- 698/-	
21	ELEVEN WAY NO-OFF (30°) 	1 4	ST057 ST077	374/- 649/-	
22	ELEVEN WAY WITH OFF (30°) 	1 2	ST068 ST088	374/- 649/-	





STS FORWARD - REVERSE SWITCHES

Sl. No.	Switching	Type	AMPERES		Cat No.	Description	Unit Price (Rs.)	Product Picture
			AC1	AC3				
23		ST 6	16	6	ST 211	Three pole reversing	187/-	

STS AMMETER SELECTOR SWITCHES

Sl. No.	Switching	Pole	Amps	Type	CatNo.	Description	Unit Price (R.s)	Product Picture
24		3	6	ST 6	ST 325	To read current in each phase use of CTS with off.	187/-	

STS VOLTMETER SELECTOR SWITCHES

25		3	6	ST 6	ST 312	Voltage between phase with OFF	168/-	
26		3	6	ST 6	ST 313	Voltage between phase to phase and phase to neutral with OFF	167/-	
		3	10	ST 10	ST 313		180/-	

The Price will be inform at the time of Enquiry.

Test certificates :-

Full range of products which is manufactured by us fully conformed to national and international standards like IS, BS, IEC, apart from ISI marking wherever applicable. The products are also tested at reputed Govt. Test laboratories.


Technical Approvals :-

Our products are approved from Railways and have been supplied to almost every Railways organization in the country. Apart from Railways, our products are also approved from different Organizations like NTPC, State Electricity Boarb, Steel Plants, Engineers India Ltd. and hundreds of other government, private and public sector Institutions.

Terms & Conditions :-

- 1 The supersedes all previous price lists.
- 2 Excise duty extra as applicable at the time of dispatch
- 3 The price are exclusive of sale tax and other Central/State/Local Taxes, octroi, surcharges will be extra as actual at the time of dispatch.
- 4 The price are on F.O.R. works Noida.
- 5 The prices are subject to change without prior notice.
- 6 Insurance charges will be charged extra at actual at prevalling rates, if required.
- 7 Our standard terms and conditions applicable to above price.
- 8 All disputes are subject to Delhi jurisdiction.

Our Standard Terms & Conditions Applicable To Above Price List Against Enquiry



Directorate of Industries,
Uttar Pradesh
उद्योग निदेशालय उत्तरप्रदेश



Shri Tulsi Switchgear Pvt. Ltd., Noida

Head Office/WorkShop:- D-176, Sector-10, Noida-201301 Ph. :0120-2553369, 2529708 Cell : 09811192507, 09911192507 email : snahata_stsnoida@yahoo.com	Central : Delhi 1725, 1st Floor, Bhagirath Palace Delhi- 110006 Ph. : 011-65108801,23862089	North : Jaipur 37, Vinoba Colony, Rajiv Gandhi Parishar Near Panch Bati, 1st Floor M.I. Road, Jaipur-302001 Cell : 09929607093
South : Secunderabad 5-4-187/7, 1st Floor Karbala Maidan, M.G Road, Secunderabad-500003(A.P) Cell : 09849796664	West : Vadodara Sant Kabir Road, Near Gandhi Gate, Vadodara- 390001 Ph. : 02653250945, cell : 09374485821	East : Kolkata 32, Ezra Street, Basement, Shop No. 5 & 6 Kolkata-700001 Cell : 09831009317

Regd. Office :- 91, Netaji Subhash Road, Kolkata-700001